



**STEELWRIST**  
EARTHMOVING EFFICIENCY



*Responsiveness  
Simplicity  
speed*



# Steelwrist – the key to unlock your excavator

## Enablers and Automation

The core of the Steelwrist product offering includes quick couplers, tilt couplers and tiltrotators that together with the control system make up the foundation for higher excavator efficiency.

Regardless if your need is a safe and robust quick coupler, a more advanced tilt coupler, or the most efficient tiltrotator, we have the solution for you.

We use the patented Front Pin Lock technology as standard which make our products fulfill the highest safety demands in all markets.

Our SQ technology will convert the quick couplers and tiltrotators to automatic quick coupler systems connecting both hydraulics and electrical signals in one movement. No need to get out of the cabin for any tool change.



## Enablers



efficiency!

**Work Tools**

A job needs a work tool and a work tool needs an excavator - not the other way around. That's the starting point when we think about how to increase your excavator efficiency. Steelwrist work tools include buckets such as grading-, digging-, cable-, v-ditch-, sorting-,

skeleton- and utility buckets as well as rippers, pallet forks, asphalt cutters and grading beams. Our powered work tools include a range of multi-, sorting- and finger grapples as well as sweepers and compactors.



**Work Tools**




**Powered Work Tools**



**Automation**

Control Systems & Synergy Features



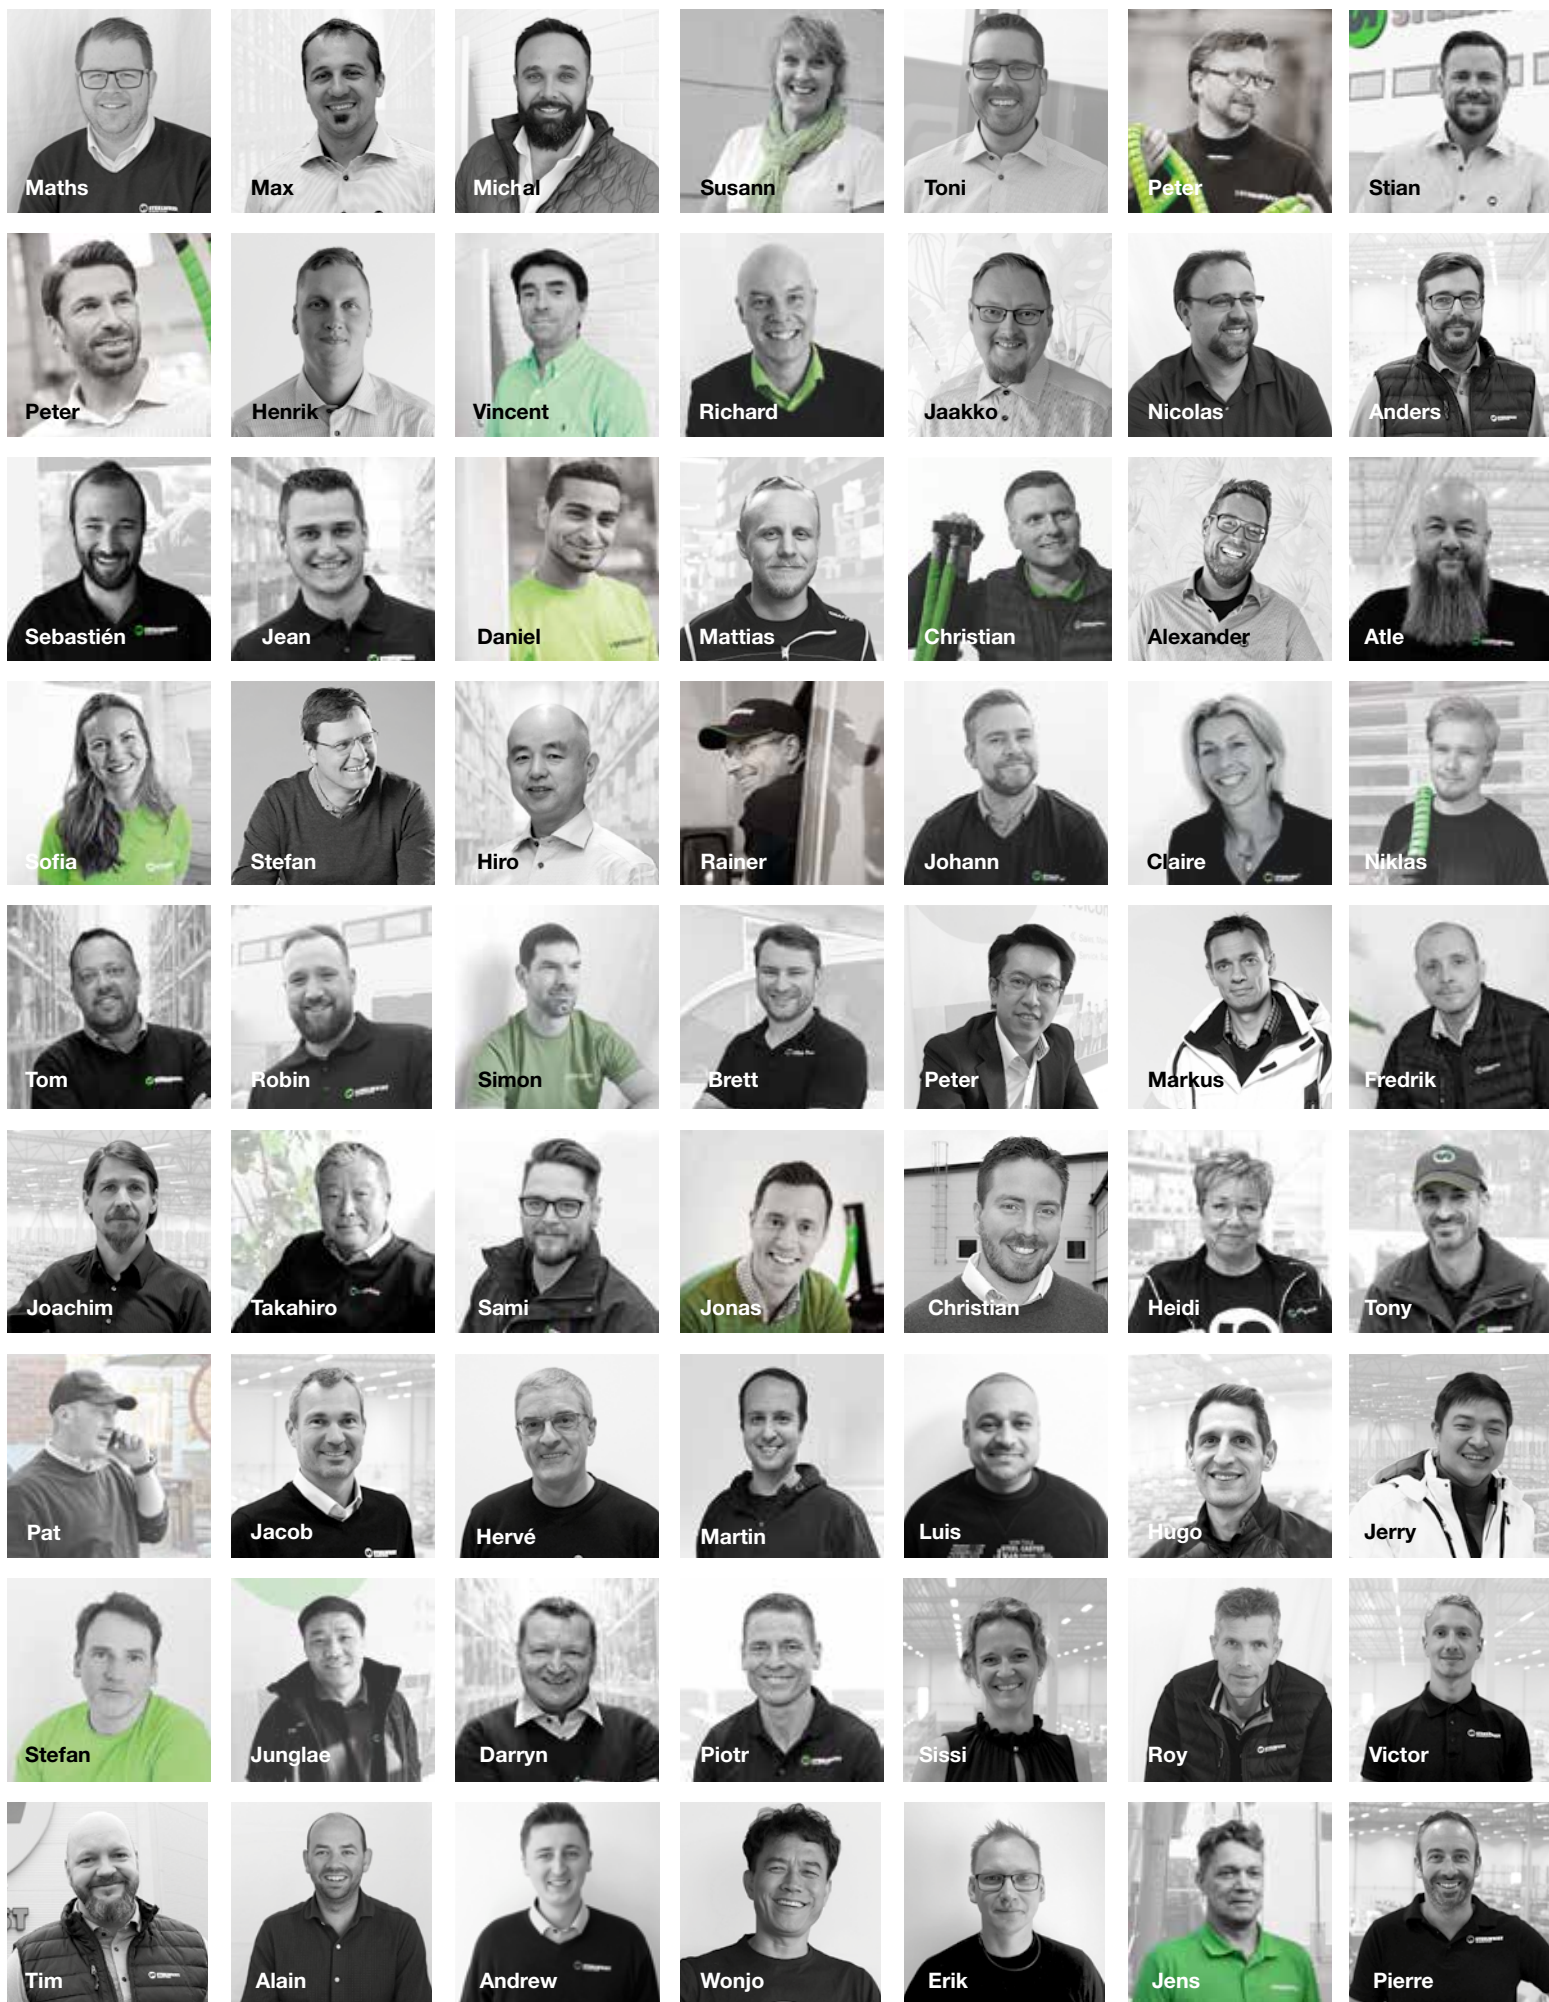





Christoffer



Henrik



Jonathan



Therése



Kai

The fastest growing manufacturer of tiltrotators, couplers and work tools in the world

NOW



Nicholas

Open-S – Alliance for fully automatic symmetrical quick couplers

2020



DongHyun

Fully Automatic Quick Couplers (SQ)  
Powered Work Tools  
Quantum and Tool Recognition

2017

Front Pin Lock

2012

Control System  
Work Tools  
First OEM agreement

2009

Steelwrist founded with focus on Tiltrotators and Quick Couplers

2005



Steelwrist People and Values  
**Responsiveness, Simplicity and Speed**

## Steelwrist Quick Couplers with Front Pin Lock

# With or without integrated oil couplings

Customers are increasingly demanding safer coupler solutions - all over the world. At the same time legislators are raising the bar for what is considered "safe". Despite this, work tools are dropped every day on job sites!

Luckily accidents are relatively rare but it is still a problem. When we launched the Front Pin Lock (FPL) technology in 2012 we wanted operator and ground personnel to feel safe during work tool changes. Today, with thousands of couplers in the field, the result has been a higher safety level and a robust solution cast in steel.

### Front Pin Lock

With the Front Pin Lock technology it is possible for the operator to see when the work tool is in a safe position. Thanks to the mechanical FPL safety we are not sensor dependant and it works equally well with all types of excavators regardless if the excavator is small, large, new or used.

With Steelwrist entrance into the demolition segment the Front Pin Lock has been upgraded to a second generation in order to support the heavy demolition work tools.

- ✓ Steel casted
- ✓ Locked front pin - maintains the work tool in a safe position
- ✓ Best in class hydraulic flow characteristics
- ✓ EN474, ISO13031 and SUVA compliant
- ✓ Expander machine pins



Positive lock indicator - green indication when the work tool is in a safe position

Negative lock indicator – the red indicates when the coupler is open

Machine Weight	Machine Quick Coupler	Building Height	Weight excl. pins	Max Oil Couplings
<b>Symmetrical</b>				
0-2 ton	<b>S30/180</b>	82 mm	15 kg	–
2-6 ton	<b>S40</b>	100-120 mm	30 kg	–
5-12 ton	<b>S45</b>	120 mm	70 kg	–
5-12 ton	<b>S50</b>	120 mm	70 kg	–
12-20 ton	<b>S60</b>	135-170 mm	120 kg	–
18-33 ton	<b>S70</b>	175-200 mm	250 kg	–
25-43 ton	<b>S80</b>	230 mm	390 kg	–
<b>Symmetrical Fully Automatic</b>				
12-20 ton	<b>SQ60-4</b>	135-170 mm	120 kg	4
12-20 ton	<b>SQ60-5</b>	135-170 mm	120 kg	5
14-22 ton	<b>SQ65</b>	160 mm	230 kg	5
18-33 ton	<b>SQ70</b>	175-200 mm	250 kg	5
18-33 ton	<b>SQ70/55</b>	175-200 mm	250 kg	6
25-43 ton	<b>SQ80</b>	230 mm	420 kg	6
40-70 ton	<b>SQ90</b>	265 mm	750 kg	9





## Steelwrist SQ Auto Connection System

# Changing powered work tools in seconds

The demand for productivity is constantly rising and in some applications the need for quick tool changes is almost continuous.

With Steelwrist SQ technology you change between hydraulic powered work tools as well as mechanical work tools in only seconds – all without leaving the cabin!

In 2017 we introduced our patented Qplus™ technology (Pat.Pend.) which radically changes the "inside" of the hydraulic couplings.

### **Open standard**

We believe in open standard interfaces, so the SQ system is designed to be able to connect to other brands using the same type of oil connection system.

**Steelwrist Qplus™** is the label we have put on all the improvements we have developed compared to competitor solutions. Higher flow, more uptime and improved serviceability are the main benefits for the operator.

### **Qplus™ - Higher flow!**

With Steelwrist Qplus™ the flow area measure up to 37 percent more compared to competitor products (depending on coupling size).

### **Qplus™ - More uptime!**

Steelwrist Qplus™ sealing technology is completely new and significantly more durable compared to competitor products. This will give you more hours in operation before sealings have to be changed.

### **Qplus™ - Improved serviceability!**

Changing seals in Steelwrist Qplus™ couplings is done fast and easy without need for proprietary and complicated tools.

## Steelwrist Tiltrotator

# The most compact and optimized tiltrotator on the market

Our core values are responsiveness, speed and simplicity. This coupled with a rigorous attention to detail has allowed us to take the leading technology role within the business.

### SQ Technology

All tiltrotators from X18 and upwards can be equipped with our SQ full automatic technology. SQ on the top side (upper coupler) of the tiltrotator for rapid change between tiltrotator and other work tools.

SQ on the bottom side (attachment coupler) of the tiltrotator will allow for rapid change between hydraulic powered work tools, or why not sandwich with SQ on both top and bottom.

### High Flow Hydraulics

Steelwrist high flow swivel is raising the bar for compact high flow hydraulics. This will allow you to use powered work tools like never before or just your tiltrotator in a more fuel efficient way. The high flow swivel can also include an electrical connection that can control valves on a work tool below the tiltrotator. Central lubrication can also be automatically connected to a work tool below the tiltrotator.

### The Gripper

An integrated gripper is an amazing tool that increases your productivity even further. The gripper opens widely, closes almost entirely, has robust cylinder covers and does not interfere with excavation. Of course, it can be retrofitted.



- ✓ High 45° tilt angle
- ✓ Direct fit or Sandwich
- ✓ Steel casted
- ✓ Vertical tilt cylinders that allow digging in narrow trenches
- ✓ Lowest building height in the market
- ✓ Robust gripper cylinder covers
- ✓ Four finger gripper (X12 and up)







✓ Grease lubrication for longer life time and connection to central lubrication

✓ Coupler with Front Pin Lock for safe tool changes

✓ High flow hydraulics

✓ Load holding valves



Machine Weight	Tiltrotator	Building Height (from)	Weight (from)
0-2 ton	<b>X02</b>	260 mm	60 kg
2-4 ton	<b>X04</b>	343 mm	115 kg
4-6 ton	<b>X06</b>	333 mm	135 kg
5-7 ton	<b>X07</b>	396 mm	195 kg
7-12 ton	<b>X12</b>	425 mm	285 kg
10-14 ton	<b>X14</b>	432 mm	380 kg
12-18 ton	<b>X18</b>	458 mm	400 kg
16-20 ton	<b>X20</b>	508 mm	445 kg
18-26 ton	<b>X26</b>	536 mm	570 kg
25-33 ton	<b>X32</b>	625 mm	840 kg

Q4 2020

## Steelwrist Tilt Couplers

# When a robust tilt function is enough

### Tilt Coupler

The Steelwrist tilt coupler is a combination between a robust tilt motor and the patented Front Pin Lock technology from Steelwrist.

With the Steelwrist tilt coupler you will get a safe quick coupler solution when you just need the tilt function and not the full blown tiltrotator functionality.

The Steelwrist tilt coupler is based on the steel casted coupler as well as the robust direct fit top with expander pins.

- ✓ Front Pin Lock coupler for safe work tool changes
- ✓ Hose free internal channels to locking cylinder
- ✓ Large contact surfaces to work tool thanks to steel casting



### TCX

The TCX - a tilt function for the smallest excavators. Available as Direct mounted with S30/180 coupler, both manual snap-on or hydraulic.



- ✓ Expander pins
- ✓ Up to 2x90° tilt angle
- ✓ Overload protection with cross-over valves

Machine Weight	Tilt Coupler/ TCX	Tilt Angle	Building Height	Weight excl. pins
0-2 ton	<b>TCXS30/180</b>	±30°	160 mm	28 kg
2-6 ton	<b>TC050/S40</b>	±90°	348 mm	95 kg
5-7 ton	<b>TC070/S40</b>	±90°	380 mm	145 kg
5-12 ton	<b>TC100/S45</b>	±90°	446 mm	210 kg
5-12 ton	<b>TC100/S50</b>	±90°	446 mm	210 kg
12-20 ton	<b>TC180/S60</b>	±60°	495 mm	360 kg
12-20 ton	<b>TC180/SQ60-5</b>	±60°	495 mm	380 kg
18-24 ton	<b>TC240/S70</b>	±60°	600 mm	620 kg
18-24 ton	<b>TC240/SQ70</b>	±60°	600 mm	650 kg



# Steelwrist GEOfit and SQ Adaptors

## Connecting work tools efficiently

Connecting the tiltrotator or work tools in an efficient way is always a good idea. Regardless if you are looking to safeguard proper maintenance by connecting to a central lubrication system, or if you are chasing seconds when changing work tools we have the solution that you need.

### SQ adaptors

The main reason to go for SQ couplers or a tiltrotator with SQ bottom is when the work requires many work tool changes. Regardless if you need an adaptor plate or a weld on bracket we have the cost effective brackets that you need.

All male couplings in the SQ adaptors includes the Qplus™ technology giving your work tool higher flow capabilities and more uptime. Our SQ adaptors build on the Symmetrical (S-type) standard with the addition of oil couplings. Steelwrist SQ adaptors therefore work perfectly with other manufacturers having the same dimensions and positions.

### GEOfit

GEOfit (Grease, Electricity, Oil) connects the hydraulics, electrics and central lubrication to your excavator with a simple connection.



## Steelwrist Control Systems

# Connected system for highest uptime

Steelwrist supply two types of control systems, both do the job, both comply with all regulations and both will increase your efficiency.

The four hose proportional machine control is the more basic system (see Hard facts page 24).

### The Quantum platform

Multifunctional ergonomic joystick, simultaneous usage of all functions, remote support and individual profiles for all operators or work tools - all key features to unlock the true efficiency of your excavator. All these are obviously standard in our Quantum platform.

With the Quantum app on your smartphone or display in the cabin you will manage settings in a user friendly way.

Add on functionality like joystick steering, track steering, boom swing control or blade control when needed.



#### Positioning System

- ✓ Direct link to your Machine Control System
- ✓ Clinometer for tilt and rotation angle indication
- ✓ Autotilt




#### Remote Support

- ✓ One click away from online support
- ✓ Upgrades online

#### Tiltrotator Control

- ✓ Simultaneous use of all functions
- ✓ Based on technology and knowledge from more than 55 000 tiltrotator installations



Joystick Steering



Track Control





# Automatic optimization and tracking

## Data to your Machine Control System

The basic idea behind the Quantum based Tool Recognition (ToolRec) is a system that automatically detects the work tool which is connected to the excavator. This information can be used by any of our partner systems that you use in your everyday work - Machine Control System, Weighing System, Tiltrotator Control System etc.

## Automatic tiltrotator settings

As standard function in our Quantum system each work tool (ToolRec module) can be configured with custom tiltrotator settings. This helps the operator to always optimize tiltrotator performance.

## Easy to add new work tools

Setting up a new work tool in Quantum ToolRec is very easy. Just mount the ToolRec module on the work tool, open the Quantum app and tap the new work tool that appears automatically. Name the work tool to your liking and it is now available to any supporting system.

## Keep track of your work tools

With Tool Recognition you will have the option to localize your work tools on the workplace as they are tracked. We monitor both the physical position as well as utilization. If you have regular service intervals on your work tools we can automatically call your attention to when the service is due.

### Tool Recognition

- ✓ Autodetect used work tools and set profile in MCS
- ✓ Adjust tiltrotator automatically depending on work tools
- ✓ Keep track of your work tools



### Quick Coupler Safety

- ✓ Full Quick Coupler safety with SQ



## Steelwrist Powered Work Tools - Grapples

# Grapples for your everyday tasks

Steelwrist grapples are made to last and to make your day easy, although each model has its specialized purpose, all are still extremely useful for multipurpose use. You choose the grapple that fits your needs, but you will end up using it for many more tasks.

### Multi Grapples

Application areas are general purpose and log handling such as heavy lifting, stone laying, sorting, loading of cut-to-length timber and waste wood handling.

By-passing jaws that close fully, so that also thin objects can be handled with ease. Hardox 500 in all wear plates and optimized roll in/roll out geometry for log handling.



	Machine Weight	Grapple	Load Area m <sup>2</sup>	Opening width	Max Load	Weight
Multi grapple	3-6 ton	<b>MG20</b>	0,2	1357 mm	3000 kg	192 kg
	6-12 ton	<b>MG25</b>	0,25	1515 mm	5000 kg	312 kg
	8-16 ton	<b>MG32</b>	0,32	1830 mm	6000 kg	410 kg
	12-18 ton	<b>MG40</b>	0,4	1938 mm	7000 kg	561 kg
	19-26 ton	<b>MG55</b>	0,55	2432 mm	10000 kg	869 kg
Sorting grapple	6-12 ton	<b>SG20</b>	0,2	1250 mm	3000 kg	198 kg
	8-16 ton	<b>SG25</b>	0,25	1707 mm	6000 kg	377 kg
	10-20 ton	<b>SG32</b>	0,32	1830 mm	7000 kg	540 kg
	16-26 ton	<b>SG40</b>	0,4	2204 mm	8000 kg	717 kg
	22-32 ton	<b>SG55</b>	0,55	2716 mm	12000 kg	1268 kg
Finger grapple	6-12 ton	<b>FG20</b>	0,2	1389 mm	3000 kg	219/242 kg
	8-16 ton	<b>FG25</b>	0,25	1552 mm	6000 kg	407/439 kg
	10-20 ton	<b>FG32</b>	0,32	1823 mm	7000 kg	630/680 kg
	16-26 ton	<b>FG40</b>	0,4	1956 mm	8000 kg	724/785 kg





- ✓ Tip-to-tip closing
- ✓ Mechanical end-stops
- ✓ Turnable and bolted cutting edges in HB500 steel

## Sorting Grapples

Application areas are the tougher tasks as large rock handling, recycling, scrap, sorting and medium duty demolition work. High clamp force and wide opening give you the flexibility that you need.

## Finger Grapples

A heavy duty five or seven finger universal grapple where dedicated application areas are handling of stumps, debris, scrap and forest residue.

### Common features between all models:

- ✓ Wide opening. Also available with SQ top, or other standards as S-type, CW-type and HS-type
- ✓ Expander pins
- ✓ Dual guide bars
- ✓ Integrated load holding valves
- ✓ 5° bracket angle to make grapple level with tiltrotator rotation plane
- ✓ High clamp force



- ✓ By-passing jaws
- ✓ Hardox 500 in all wear plates and hard face
- ✓ HB500 welding in jaws for long life time
- ✓ Wide opening and full closure



## Steelwrist Powered Work Tools - Compactor

# Compaction made easy

Steelwrist Compactors are designed for quiet, safe, comfortable and maintenance free compaction of soil, pipeline trenches, embankments, pits and shafts.

The low height and off-center bracket position increase the reach and you can use the compactor under obstacles and in other narrow positions.

The open design allows the compactor plate to self-clean and prevent backfill material to jam the compactor.

The angled housing design and rubber buffers provides optimum force distribution for the compaction work and makes it possible to use in rough terrain. The 15 degree angle also reduce stress on the rubber buffers resulting in less wear.

Additionally the job site safety level is improved as the need for personnel directly in the work area is reduced.

- ✓ 15° housing for best force distribution
- ✓ Pressure and flow rate control for overload protection
- ✓ Off centre bracket position allows for compaction under obstacles
- ✓ Bolt on top brackets available with S-, SQ-, CW- and HS-type standards
- ✓ Excenter motor permanently lubricated
- ✓ Low noise motor and rubber buffers reduce oscillation to the operator's cabin



Machine Weight	Compactor	Force kN	Flow l/min	Weight
2-6 ton	<b>HC20</b>	20	30-50	250 kg
5-12 ton	<b>HC40</b>	40	60-80	387 kg
10-22 ton	<b>HC60</b>	60	90-120	620 kg
16-30 ton	<b>HC90</b>	90	120-140	969 kg



## Steelwrist Powered Work Tools - Sweepers

# High performance excavator sweeper

Regardless if you have a need for cleaning pavements, cable trenches, railway switches, tram tracks, roofing, containers, flooding or other disaster areas from debris, material or snow, the Steelwrist sweeper range give you the tool to take on the job.


Instead of using manual shovels, snow plows or other similar work tools the Steelwrist sweeper range will give you access to the work area in a completely different and much more effective way.

Dual direct drive hydraulic motors safeguard the torque needed for efficient brushing and together with Beeline brushes, a long lifetime.

The mechanical fixed brush can easily be used under the tiltrotator.




- ✓ Works great with our SQ technology
- ✓ Dual direct drive hydraulic motors
- ✓ Bolt on top brackets available with S-, SQ-, CW- and HS-type standards
- ✓ Integrated parking stand
- ✓ Mudflap as standard

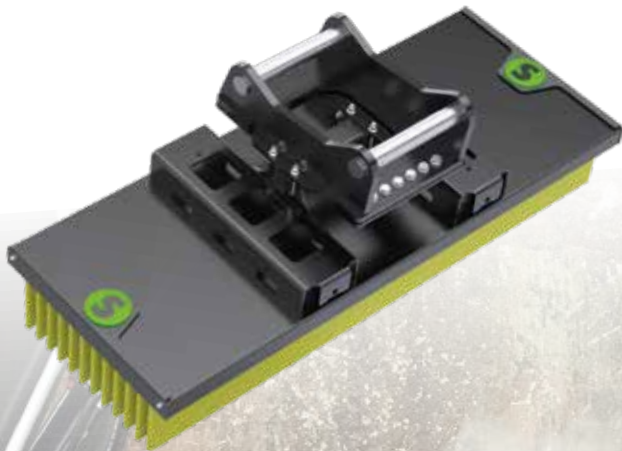

Model	Width	Weight	Motor	Option	Flow req.
<b>SW1000</b>	1000 mm	170 kg	Dual Motor Direct Drive	Twisted core cartridge brushes	40-130
<b>SW1500</b>	1500 mm	200 kg	Dual Motor Direct Drive	Twisted core cartridge brushes	40-130
<b>SW2000</b>	2000 mm	250 kg	Dual Motor Direct Drive	Twisted core cartridge brushes	40-130



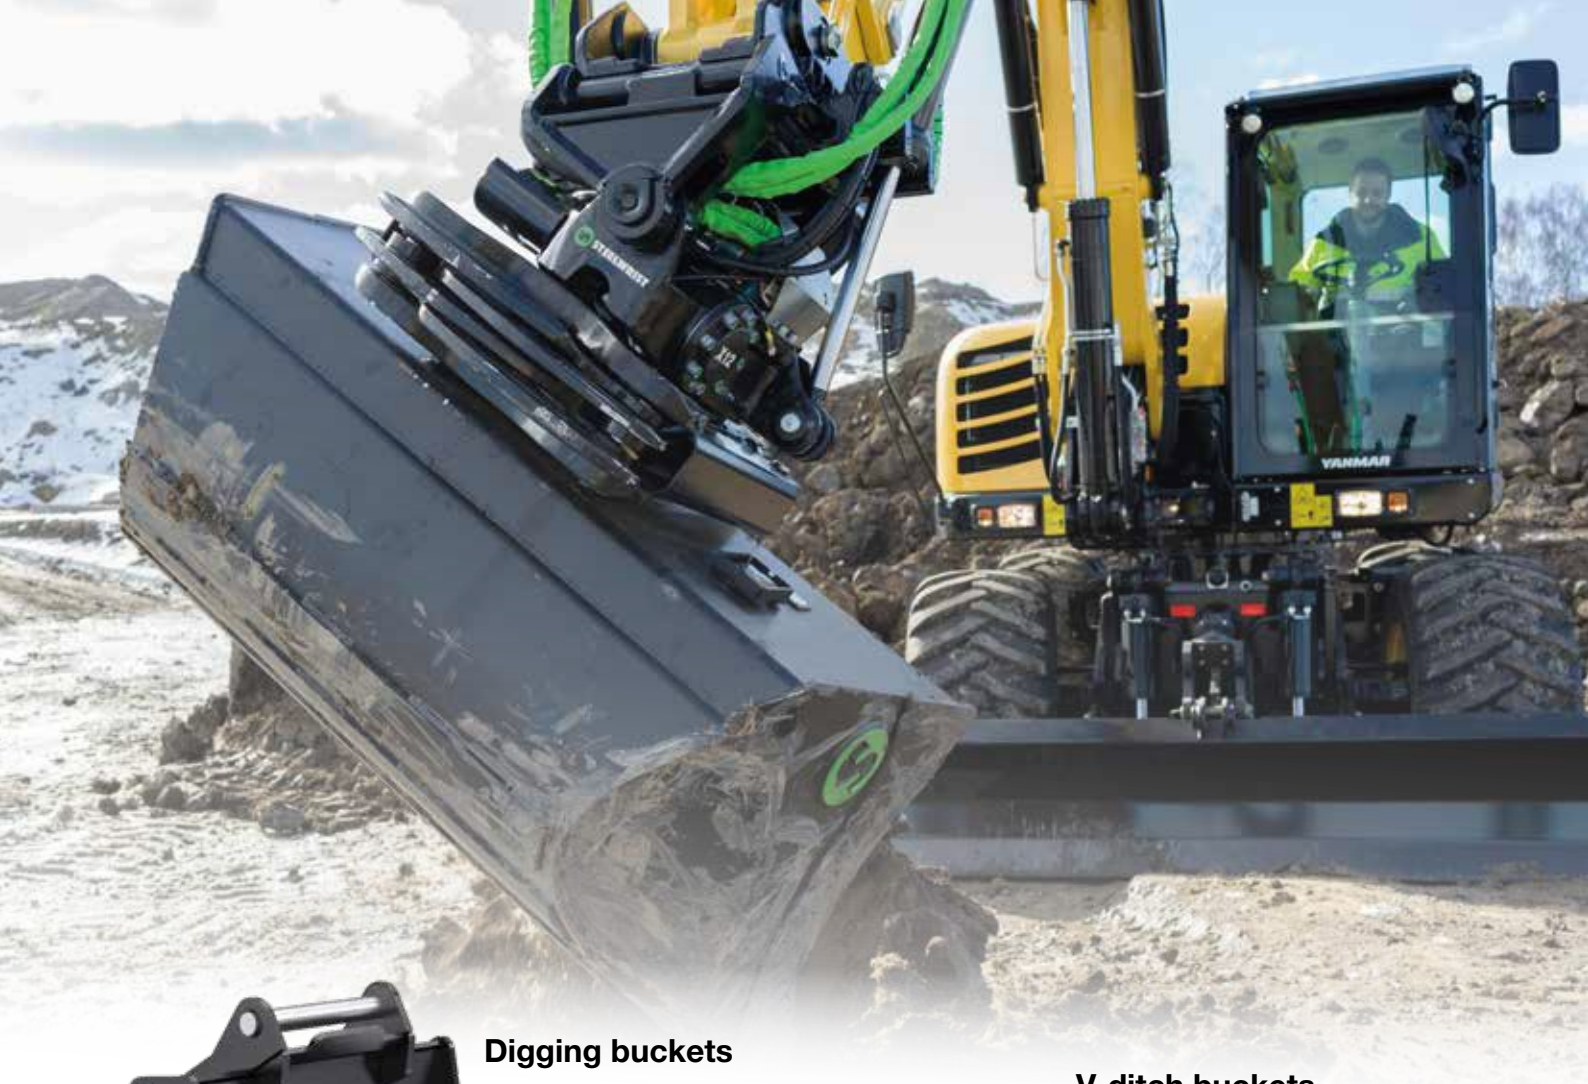

### Digging buckets

- ✓ Hardox 500 material in all wear plates
- ✓ 30° cutting edge angle
- ✓ CAT J-style tooth system



### V-ditch buckets

- ✓ Hardox 500 material in all wear plates



### Grading buckets

- ✓ Rounded back without corner for easy fill/empty cycle
- ✓ Conical shape for work with tiltrotator
- ✓ Hardox 500 material in all wear plates
- ✓ 20° cutting edge angle
- ✓ Cutting edge in HB 500 material





## Steelwrist Buckets and Work Tools

# Lighter, more durable, more affordable

Our buckets are constantly evolving based on customer feedback and we are now on our fourth generation. The main benefits are even further optimized geometry and volumes.

High grade steel allows us to make a more wear resistant bucket without increasing the weight.

Thanks to the sharp growth of our bucket business we have acquired economies of scale in production - the benefit for you is that we can offer high quality buckets at a more affordable price.

Most work tools we have on stock for fast delivery.



### Sorting buckets

- ✓ Hardox 500 material in all wear plates
- ✓ 500 Brinnell steel rods



### Skeleton buckets

- ✓ Hardox 500 material in all wear plates

### Cable/Trench buckets

- ✓ Hardox 500 material in all wear plates
- ✓ Cutting edge in HB 500 material
- ✓ 30° cutting edge angle



### Utility buckets

- ✓ Hardox 500 material in all wear plates
- ✓ Cutting edge in HB 500 material
- ✓ Dimensions for working in water and sewage applications
- ✓ 30° cutting edge angle



✓ Ripper S40 to S70



✓ Pallet forks for  
3-30 ton excavators

✓ Asphalt cutter for  
3-30 ton excavators



✓ Grading beam





## Steelwrist Buckets and Work Tools – Custom Build

# Design your own buckets!

If I only had that specific bucket shape then I would be able to do this job much faster... Ever had that feeling?

We know that many experienced operators may have specific needs! As a technology leading work tool supplier we have the tools available so that you can design your own custom built bucket online. Super easy!

Visit our homepage at [steelwrist.com/custombuild](https://steelwrist.com/custombuild) and design your own bucket.

You can shape the bucket to your own desire, add teeth and determine material specifications. Price will adjust automatically depending on your choices. Once you have fixed the design and paid we will manufacture the bucket and ship it to the address of your choice.

[steelwrist.com/custombuild](https://steelwrist.com/custombuild)



## Steelwrist Support


# Fast service wherever you are

What do you do when the unexpected happens and something is broken?

We train and support our dealers for the best service. This means that you get help as soon as something happens. If your dealer does not have the part in stock, we can dispatch from one of our regional warehouses.

With the Quantum platform we can also connect to your system directly from our support line. Steelwrist support is built around a number of core concepts in order to give both end customers and Steelwrist dealers the best possible support, 24/7.

With product registration you get two year warranty.

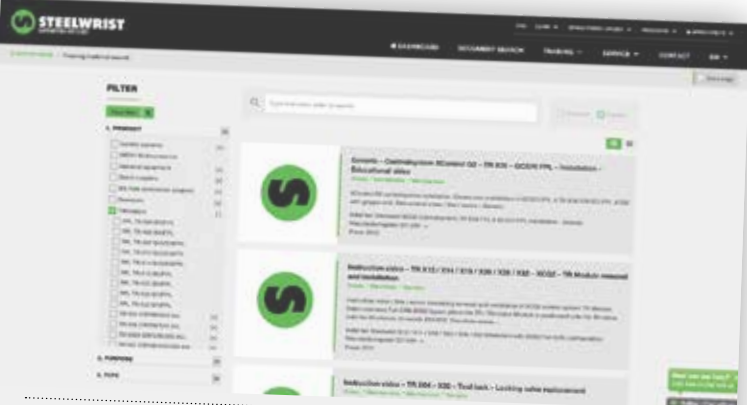

**SUPPORT LINE**  
Our telephone and remote support organisation for end customers and dealers.

**SERVICE PARTNERS**  
Both machine dealers and independent service partner. Our first line support locally in each market.


**SUPPORT WEB**  
Available to all dealers and service partners. A comprehensive site with technical information.

**FULL SERVICE**  
Our refurbishment program at a fixed price.

**APPLICATION TECHNOLOGY**  
Support for dealers and service partners. Available in each market.

**SPARE PARTS MANAGEMENT**  
Shipment the same day from either local or central warehouses.

**ACADEMY**  
Both onsite and online via the Support Web.





## About tiltrotators

Although the tiltrotator was first invented in the late 1980's the technical development pace is today extremely high. The market penetration varies a lot between the most advanced markets where above 90 percent of all excavators have a tiltrotator, to start-up markets where only the true first movers looking for increased efficiency are active.

If you are an experienced user then you probably know what you want, but if you are in the process of investing in your first tiltrotator then here are some basic "good to know" facts that we hope will give you guidance to the best solution for you. Also check out "Ten tips when choosing a tiltrotator" on our homepage.

## About quick coupler standards

The overall regulation for how quick couplers should be designed and controlled can be found in the standard ISO13031:2016, although local regulations may exist. ISO13031 divides quick couplers into three allowed types being Form-locked, Force-locked and Wedge-locked. Each type has its specific safety requirements.

Quick couplers can also be divided into Universal (force-locked) and Dedicated (may be form- or wedge-locked). The idea behind the Universal couplers is that they are supposed to pick up the excavator's original bucket. However since all excavator manufacturers have different linkage dimension (width, pin c-c distance and pin diameter) the universal couplers can often pick up buckets from several different manufacturers.

The advantage with universal quick couplers is that they are easy to start with. However, they normally have a high building height, are heavy with a relatively limited surface area to the bucket pin which normally increase wear, increase fuel consumption and reduce break out force at the tooth point.

Several different types of Dedicated systems exist. They have in common that they are not trying to pick up the excavator's original bucket but instead all have a dedicated and standardized bucket interface. The advantage with dedicated couplers is that they are normally compact and lighter in design, however the bracket of the original bucket needs to be changed.

In more advanced markets where a dedicated standard is well established normally all buckets with new machines are delivered with standard coupler and a set of buckets with the corresponding bracket.

All Steelwrist products are available with interfaces following the symmetrical standard. However we also deliver products with Universal couplers as well as the Dedicated Lehnhoff (HS), Verachtert (CW) and Bofors. All SQ products follow the symmetrical standard.



Quick Coupler	Market area	Origin	Type	Standard	Function	Direct fit tiltrotator	Sandwich tiltrotator	Oil Couplings
<b>Symmetrical</b>	International	Scandinavia	Dedicated/ Wedge-locked	Open standard	Compact, light weight, growing internationally	Yes	Yes	Option
<b>Universal</b>	International	UK, Australia, New Zealand	Universal/ Force-locked	N/A	Entry level coupler, high, heavy, important in Anglo-saxon markets	Yes	N/A	N/A
<b>Verachtert CW</b>	Mainly Holland and Belgium	Holland	Dedicated/ Wedge-locked	Verachtert/ Caterpillar	Heavy, safe	Yes	N/A	N/A
<b>Bofors NTP</b>	Finland	Sweden	Dedicated/ Wedge-locked	Open standard	Compact, need manual shimming, developed in 60's	Yes	Yes	N/A
<b>Lehnhoff HS</b>	Germany	Germany	Dedicated/ Wedge-locked	Lehnhoff/ Komatsu	Relatively compact, light weight - strong in Germany	Yes	Yes	Option

## About Direct fit vs. Sandwich

### Direct fit

In a direct fit configuration the tiltrotator is permanently mounted to the dipper arm of the excavator. Direct fit is common on compact excavators, and on couplers with high building height like CW and Universal.

### Sandwich configuration

In a sandwich configuration the machine's quick coupler is first mounted on the dipper arm of the excavator. The top of the tiltrotator then has the same type of bracket as a bucket which means that it can be picked up with the machine's quick coupler. This is often used for excavators of 14 ton and above and where work tools like hydraulic breaker is used frequently.



## About Control Systems

In general two types of control systems exist for controlling the tiltrotator on an excavator.

Four hose systems (or variants thereof) where the tiltrotator has on/off valves and the flow is controlled solely from the excavator. Four hose systems are often used for compact excavators as it is less costly and often good enough for the average compact excavator.

However the more demanding customers on mid size excavators often choose two hose systems because of the possibility to use

all functions simultaneously, a more fine tuned solution. In two hose systems the tiltrotator control systems takes care of it all.

Both four hose and two hose systems can be connected to Machine Control Systems like Leica, Topcon, Trimble and Novatron. The two hose systems are often further enhanced by adding joystick steering for both wheeled and tracked excavators, as well as boom swing control and blade control etc.

Four hose system	Excavator hydraulics	Tiltrotator (TR)			Comment
		Control System	Function	Valves in TR	
	Circuit 1, dual direction, proportionally controlled from the excavator, original joysticks must have rollers or similar.	–	Rotation	On/Off (non directional)	Rotation controlled directly from the machine. Flow control depending on excavator hydraulics.
	Circuit 2, dual direction, proportionally controlled from the excavator, original joystick must have rollers or similar.	On/Off control	Tilt	On/Off (non directional)	Tilt, extra functions and lock share the same circuit, and only one function can be used at the same time. Flow control depending on excavator hydraulics.
			Extra 1 (gripper option)	On/Off (non directional)	
			Extra 2 (work tools)	On/Off (non directional)	
			Coupler lock	On/Off (non directional)	

Two hose system	Excavator hydraulics	Tiltrotator			Comment
		Control System	Function	Valve type	
	One circuit, single direction. Original joysticks will be replaced with Steelwrist joysticks with rollers.	Proportional control with compensation if several functions run simultaneously.	Rotation	Proportional (directional)	All functions can be used simultaneously.
			Tilt	Proportional (directional)	
			Extra 1 (gripper option)	Proportional (directional)	
			Extra 2 (work tools)	Proportional (directional)	
			Coupler lock	On/Off (non directional)	



# About oil flow vs pressure drops

## We often get questions like:

*- I have a work tool that needs 120 liters of oil, can I run it under the tiltrotator?*


This is a more complicated question than it may seem at first glance. Let us walk you through the facts.

All hydraulic systems have internal resistance, which is correctly called pressure drop. Hydraulic systems with over-dimensioned hoses, large valves and straight channels have low internal resistance whereas hydraulic systems with under-dimensioned hoses, small valves and many sharp angles have higher internal resistance. The internal resistance in the system will define how much flow you can get through the system at any given pressure. So far quite straight forward and intuitive.

The relationship between pressure and flow is however exponential. If you want to increase flow you will need to increase the pressure exponentially. At very low flow, the additional pressure needed to get "X" liter in addition is not that much. However, in the same hydraulic system already at high flow, the pressure needs to be increased a lot in order to get the same amount of "X" in increased flow.

As a result it is possible to plot the relationship between pressure and flow. This will show how many liters per minute you can get through the system at a certain pressure level. For the sake of argument let's call this the Operating Limit Curve. We also need to add a second line describing the hydraulic pressure limit the machine can be used at. In most cases this pressure is always the same, independent of the flow. Let's call this one the Maximum Pressure Curve. The defined area in between the Operating Limit Curve and the Maximum Pressure Curve, is where the machine will work. Let's call this the Working area.

An example - let's say you have a maximum pressure of 200 bar and you rotate a hydraulic sweeper in the air as fast as you can. You would get 80 liters per minute through the system at point A. Now you engage the sweeper with the ground and start working.

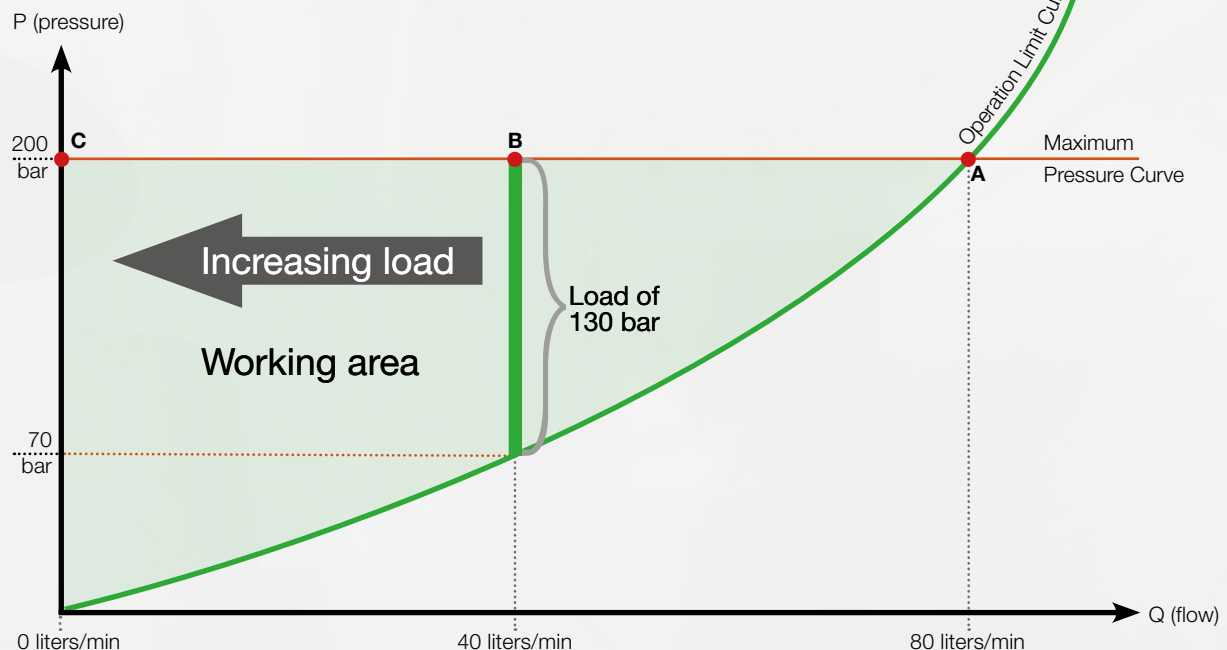

Depending on how much you lower the boom and push the sweeper to the ground, the torque needed to the driver shaft of the sweeper increases. Let's say you push it so the motor needs 130 bar for the torque. The pressure needed for the work to be done, is only possible to reach at a flow of 40 liters per minute, at point B.

Since we started the sweeper in the air at full speed with maximum system pressure, workpoint A, the only way the hydraulic system can handle an increasing load is to reduce the flow. In this case, you have to control the boom lift so the sweeper does not stall and the flow in the system decreases to zero, workpoint C.

This is also applicable to a cylinder application and for example a gripper. If we are closing the gripper in the air with no load, with full speed, we will reach a flow of 80 liters per minute at point A. However, with increasing load to the gripper jaws the cylinder needs higher pressure to deliver a greater force. In most cases the point of using a gripper is to hold material as steady as possible which is achieved with maximum pressure in the cylinder - which is when the flow is down to zero.

It has to be mentioned that in practise using proportional valves and variable flow, you will end up with different workpoints, although limited by the defined working area.

So back to the original question. Is it possible to use the 120 liter tool below the tiltrotator? The answer is: 'It depends...'

Of course all work tools will move, but the question is how well the tool is matched against the capabilities of the machine as well as the match to the flow requirements of the work tool.

The Steelwrist High Flow Swivel will make the following available:

- 200 liters available at a pressure of 250 bar
- 150 liters available with a pressure drop of 40 bar

Quick Coupler										
Machine Weight [ton]	0-2	2-6	2-6	5-12	5-12	12-20	12-20	18-33	25-33	25-43
Model	S30/180	S40	S40w	S45	S50	S60	S60w	S70	S70w	S80
Mechanical/Hydraulic	M/H	H	H	H	H	H	H	H	H	H
Building Height [mm]	82	100	120	120	120	135	170	175	200	230
Weight [kg]	15	30	35	70	70	120	130	250	260	390
Width [mm]	200	200	200	290	270	340	340	450/550*	450	590
Length [mm]	230	300	300	430	430	480	480	600	600	670
Lifting hook	No	1 ton	1 ton	3 ton	3 ton	5 ton	5 ton	8 ton	8 ton	10 ton
Front Pin Lock/Hook	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	FPL2
Body	Casted	Casted	Casted	Casted	Casted	Casted	Casted	Casted	Casted	Casted
Shaft dia. dipper [mm]	25-35	35-45	35-50	45-60	45-60	60-80	60-80	60-80	70-90	90-110
Width dipper arm [mm]	98	120-160	160-200	150-228	150-228	252-304	300-330	280-400	350-431	Max 480
Pin distance [cc] [mm]	85-150	160-270	235-345	220-365	220-365	330-460	400-460	270-485	470-565	385-585

\* SQ70/55

SQ Coupler							
Machine Weight [ton]	12-20	12-20	14-22	18-33	18-33	25-43	40-70
Model	SQ60-4	SQ60-5	SQ65	SQ70	SQ70/55	SQ80	SQ90
Dimensions [same as]	S60	S60	S65	S70	S70	S80	S90
Weight	120	120	230	250	280	430	750
Couplings	4	5	5	5	6	6	9
3/8"	-	2	-	-	-	-	1
1/2"	2	1	2	2	2	2	3
3/4"	2	2	3	1	2	2	1
1"	-	-	-	2	2	2	4
Electrical Connector	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Tilt Coupler / TCX									
Max Machine Weight [ton]	0-2	2-6	5-7	5-12	5-12	12-20	12-20	18-24	18-24
Model	TCX S30	TC050/ S40	TC070/ S40	TC100/ S45	TC100/ S50	TC180/ S60	TC180/ SQ60-5	TC240/ S70	TC240/ SQ70
Weight [kg]	28	95	145	210	210	360	380	620	650
Max tilt angle [degree]	±30°	±90°	±90°	±90°	±90°	±60°	±60°	±60°	±60°
Driving Torque [kNm]	–	2,6	4,3	6,6	6,6	13,3	13,3	17,8	17,8
Holding Torque [kNm]	–	9,4	14,8	20,4	20,4	40,7	40,7	53,1	53,1
Required Oil Flow [l/min]	5-10	9-28	15-30	19-58	19-58	26-78	26-78	35-105	35-105
Max Circuit Pressure [bar]	175	210	210	210	210	210	210	210	210
Coupler	S30	S40	S40	S45	S50	S60	SQ60-5	S70	SQ70



Multi Grapple					
Machine Weight [ton]	3-6	6-12	8-16	12-18	19-26
Model	MG20	MG25	MG32	MG40	MG55
Gripper area [m²]	0,2	0,25	0,32	0,4	0,55
Gripper reach [mm]	1357	1515	1800	1938	2432
Gripper reach, smallest object [mm]	55	98	98	109	155
Max Load [kg]	3000	5000	6000	7000	10000
Weight [kg]	192	312	410	561	869
Gripper force [kN] [tip against tip]	12,5	17	21	25	38
Height [tip against tip] [mm]	843	919	1101	1127	1309
Height [max open]	747	781	949	941	1061
Width [mm]	504	594	660	691	795
Bracket	S40, S45, S50, S60, SQ60-4, SQ60-5, CW05, CW10, HS03, HS08	S40, S45, S50, S60, SQ60-4, SQ60-5, CW05, CW10, HS03, HS08	S50, S60, S70, SQ60-4, SQ60-5, SQ65, SQ70, SQ70/55, CW30, HS10	S60, S70, SQ60-4, SQ60-5, SQ65, SQ70, SQ70/55, CW30, HS10	S70, SQ60-4, SQ60-5, SQ65, SQ70, SQ70/55, SQ80, CW40, HS21

Stone and Sorting Grapple					
Machine Weight [ton]	6-12	8-16	10-20	16-26	22-32
Model	SG20	SG25	SG32	SG40	SG55
Gripper area [m²]	0,2	0,25	0,32	0,4	0,55
Gripper reach [mm]	1250	1707	1830	2204	2716
Max Load [kg]	3000	6000	7000	8000	12000
Weight [kg]	198	377	540	717	1268
Gripper force [kN] [tip against tip]	10	15	20	25	40
Height [tip against tip] [mm]	655	848	1010	1126	1301
Height [max open]	500	610	863	826	911
Width [mm]	518	600	654	700	1000
Bracket	S40, S45, S50, S60, SQ60-4, SQ60-5, CW05, CW10, HS03, HS08	S40, S45, S50, S60, SQ60-4, SQ60-5, CW05, CW10, HS03, HS08	S50, S60, S70, SQ60-4, SQ60-5, SQ65, SQ70, SQ70/55, CW40, HS21	S70, SQ60-4, SQ60-5, SQ65, SQ70, SQ70/55, SQ80, CW40, HS21	S70, SQ60-4, SQ60-5, SQ65, SQ70, SQ70/55, SQ80, CW40, HS21

Finger Grapple				
Machine Weight [ton]	6-12	10-18	8-18	16-26
Model	FG20-5/ FG20-7	FG25-5/ FG25-7	FG32-5/ FG32-7	FG40-5/ FG40-7
Gripper area [m²]	0,2	0,25	0,32	0,4
Gripper reach [mm]	1389	1552	1823	1956
Max Load [kg]	3000	6000	7000	8000
Weight [kg]	219/242	407/439	630/680	724/785
Gripper force [kN] [tip against tip]	10	15	20	25
Height [tip against tip] [mm]	817	877	1033	1088
Height [max open]	686	700	863	866
Width [mm]	504	672	698	754
Bracket	S40, S45, S50, S60, SQ60-4, SQ60-5, CW05, CW10, HS03, HS08	S40, S45, S50, S60, SQ60-4, SQ60-5, CW10, HS03, HS08	S50, S60, S70, SQ60-4, SQ60-5, SQ65, SQ70, SQ70/55, CW40, HS21	S60, S70, SQ60-4, SQ60-5, SQ65, SQ70, SQ70/55, CW30, HS10

Grapples = Max operating pressure [bar] **250**

Compactor/Vibro				
Machine Weight [ton]	2-6	5-12	10-22	16-30
Model	HC20	HC40	HC60	HC90
Vibration Force [kN]	20	40	60	90
Vibration Frequency [Hz]	38	38	38	38
Weight [kg]	250	387	620	969
Length [mm]	700	850	960	1050
Width [mm]	410	610	700	800
Height [mm]	493	542	595	643
Load Area [m <sup>2</sup> ]	0,27	0,52	0,67	0,98
Hydraulic Pressure [rec/max]	150/250	150/250	150/250	150/250
Hydraulic Flow [l/min]	30-50	60-80	90-120	120-140
Bracket	S40, S45, S50, S60, SQ60-4, SQ60-5, CW05, CW10, HS03, HS08	S40, S45, S50, S60, SQ60-4, SQ60-5, CW05, CW10, HS03, HS08	S60, S70, SQ60-4, SQ60-5, SQ65, SQ70, SQ70/55, CW30, HS10	S70, SQ60-4, SQ60-5, SQ65, SQ70, SQ70/55, SQ80, CW40, HS21

Sweeper			
Model	SW1000	SW1500	SW2000
Width [mm]	1000	1500	2000
Motor	Dual Motor Direct Drive	Dual Motor Direct Drive	Dual Motor Direct Drive
Mudflap	Standard	Standard	Standard
Flow requirements [l/min]	40-130	40-130	40-130
Integrated parking stand	Yes	Yes	Yes
Brush / Option	Bee-Line / Twisted core cartridge brushes		
Bracket	S45, S50, S60, SQ60, SQ70, HS08, HS10, CW10, CW20		

Brush		
Model	FB1800	FB2500
Width [mm]	1800	2500
Bracket	S40, S45, S50, S60	


Grading Beam					
Model	GR1250	GR1500	GR2000	GR2500	GR3000
Width [mm]	1250	1500	2000	2500	3000
Weight [kg]	210	400	480	560	640
Bracket	S40, HS03, CW05	S40, HS03, CW05	S45, S50, S60, HS08, CW10, CW20	S45, S50, S60, S70, HS08, HS10, HS21, CW10, CW20, CW30-40	S60, S70, HS08, HS10, CW10, CW20, CW30-40



Tiltrotator (value with gripper)										
Machine Weight [ton]	0-2	2-4	4-6	5-7	7-12	10-14	12-18	16-20	18-26	25-33
Model	X02	X04	X06	X07	X12	X14	X18	X20	X26	X32
Upper coupler	DF S30/180	DF S40 HS03	DF S40 HS03	DF S40 S45 S50 HS08	DF S45 S50 HS08	DF S45 S50	DF S60 SQ60-5 HS10	DF S60 SQ65 SQ60-5 HS10	DF S60 SQ65 SQ70 SQ70/55 HS21	DF S70 SQ70 SQ70/55 HS21 S80 SQ80
Attachment coupler Dedicated	S30/180	S40 HS03 CW05	S40 HS03 CW05	S40 S45 S50 HS08 CW10	S45 S50 HS08 CW10	S45 S50	S60 SQ60-5 HS10 CW20	S60 SQ65 SQ60-5 HS10 CW20	S70 SQ65 SQ70 SQ70/55 HS21 CW30	S70 SQ70 SQ70/55 HS21 CW40 S80 SQ80
Max tilt angle [Degrees]	± 45	± 45	± 45	± 45	± 45	± 45	± 45	± 45	± 45	± 45
Req hydraulic oil flow [l/min]	15-30	20-40	20-40	30-50	70-90	80-100	80-100	100-120	100-120	120-140
Max pressure [bar]	175	210	210	210	210	210	210	210	210	210
Hydraulic extra functions	1	1(0)	1(0)	1(0)	2(1)	2(1)	2(1)	2(1)	2(1)	2(1)
A. Width [mm]	320	314 (459)	314 (459)	365 (570)	567 (578)	618 (636)	616 (717)	690 (717)	690 (807)	729 (807)
B. Length [mm]	430	525 (642)	527 (642)	618 (791)	625 (764)	724 (814)	726 (952)	816 (1003)	827 (1116)	870 (1167)
C. Building height from [mm]	260	343	333	396	425	455	458	508	536	625
D. Width cylinders [mm]	325	499	499	586	676	685	737	733	826	937
Weight from [kg]	60	115 (151)	135 (171)	195 (251)	285 (348)	380 (443)	400 (512)	445 (557)	570 (687)	840 (957)
Gripper reach [mm]	–	(425)	(425)	(513)	(508)	(508)	(820)	(820)	(960)	(967)
Tilt force [kNm]	5,9	10,6	11,0	13,8	29,0	41,0	41,0	47,0	61,0	73,0
Rotation force [kNm]	1,9	3,9	4,9	5,2	5,4	7,8	7,8	8,8	8,8	9,8
Central Lubrication	–	Option	Option	Option	Option	Option	Option	Option	Option	Option
DATATAG	–	Option	Option	Option	Option	Option	Option	Option	Option	Option

All dimensions are depending on configuration.

## Technical specifications

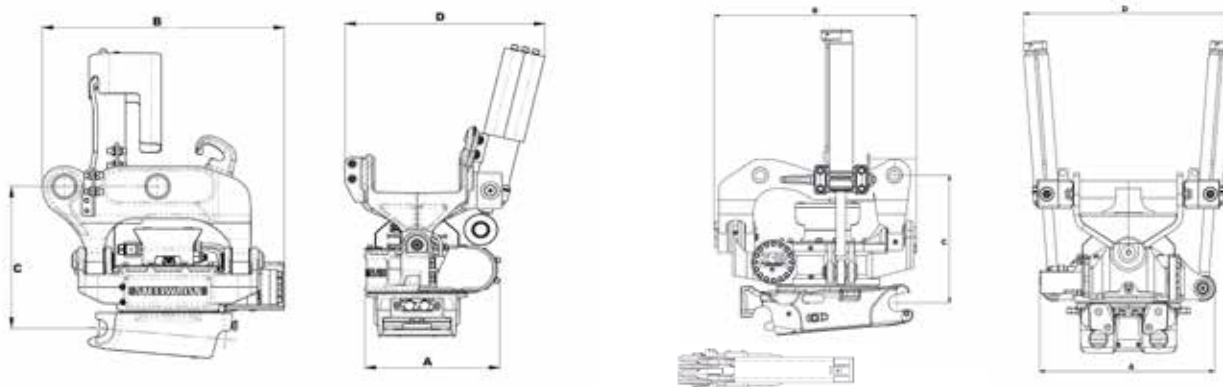

Buckets and Work Tools								
Machine Weight [ton]	0-2	0-2	1-3	2-4	3-5	4-6	5-6	6-8
<b>Grading bucket</b> Volume [liter] Width [mm] Weight [kg]	<b>GB08</b> 40 700 40	<b>GB1</b> 55 800 50	<b>GB2</b> 90 900 80	<b>GB2/GB3</b> 90/120 900/1100 80/100	<b>GB4</b> 180 1100 130	<b>GB5</b> 240 1200 140	<b>GB6</b> 300 1200 160	<b>GB6</b> 300 1200 200
<b>Digging bucket with teeth</b> Volume [liter] Width [mm] Weight [kg]	–	<b>DB1T</b> 50 400 40/60	<b>DB2T</b> 70 450 60	<b>DB2T/DB3T</b> 70/100 450/500 60/80	<b>DB4T</b> 150 600 110	<b>DB5T</b> 250 700 150	<b>DB5T</b> 250 700 150	<b>DB6T</b> 280 700 190
<b>Digging bucket without teeth</b> Volume [liter] Width [mm] Weight [kg]	<b>DB08</b> 35 400 30	<b>DB1</b> 50 400 40	<b>DB2</b> 70 450 50	<b>DB2/DB3</b> 70/100 450/500 50/80	<b>DB4</b> 150 600 100	<b>DB5</b> 250 700 130	<b>DB5</b> 250 700 130	<b>DB6</b> 280 700 170/180
<b>Cable/Trench bucket</b> Volume [liter] Width [mm] Weight [kg]	–	<b>CB1</b> 35 240 30	<b>CB2</b> 60 290 40	<b>CB3/3C</b> 80/100 300/200 80/80	<b>CB3/3C</b> 80/100 300/200 80/80	<b>CB05</b> 120 400 90	<b>CB6</b> 160 400 100	<b>CB6</b> 160 400 110/120
<b>Utility bucket</b> Volym [liter] Width [mm] Weight [kg]	–	–	–	–	–	–	–	–
<b>V-ditch bucket</b> Volume [liter] Width [mm] Weight [kg]	–	–	<b>VB2</b> 90 900/200 70	<b>VB3</b> 140 1100/200 120	<b>VB4</b> 200 1200/200 200	<b>VB4</b> 200 1200/200 200	<b>VB6</b> 240 1400/300 210	<b>VB8</b> 400 1700/300 290
<b>Sorting bucket</b> Volume [liter] Width [mm] Weight [kg]	–	–	–	<b>SOB3</b> 130 900 90	<b>SOB4</b> 200 1000 140	<b>SOB4</b> 200 1000 140	<b>SOB6</b> 300 1200 170	<b>SOB8</b> 370 1300 290
<b>Skeleton bucket</b> Volume [liter] Width [mm] Weight [kg]	–	–	–	–	–	–	–	<b>SKB8</b> 370 1000 300
<b>Asphalt cutter</b> Diameter [mm] Thickness [mm] Weight [kg]	–	–	–	<b>AC5</b> 400 8 95	<b>AC5</b> 400 8 95	<b>AC5</b> 400 8 95	<b>AC5</b> 400 8 95	<b>AC10</b> 470 10 142
<b>Pallet fork</b> Lifting capacity Width [mm] Weight [kg]	–	–	–	<b>PF2000</b> 2 ton 1200 145	<b>PF2000</b> 2 ton 1200 145	<b>PF2000</b> 2 ton 1200 145	<b>PF2000</b> 2 ton 1200 145	<b>PF2500</b> 2,5 ton 1200 205
<b>Ripper</b> Length [mm] Weight [kg]	–	–	–	<b>RP40</b> 710 100	<b>RP40</b> 710 100	<b>RP40</b> 710 100	<b>RP40</b> 710 100	<b>RP45 RP50</b> 860 190
<b>Bracket</b>	S30/150 S30/180	S30/150 S30/180	S30/150 S30/180	S40, HS03	S40, HS03	S40, HS03	S40, HS03	S45, S50, HS08



8-12	11-13	13-14	14-15	15-16	16-18	18-22	22-26	25-33	28-40	28-43
<b>GB9</b> 450 1400 260	<b>GB12</b> 550 1500 320	<b>GB14</b> 700 1500 560	<b>GB14</b> 700 1500 560	<b>GB15</b> 750 1600 590	<b>GB17</b> 900 1700 640	<b>GB20</b> 1050 1800 860	<b>GB25</b> 1250 1900 1020	<b>GB30</b> 1400 2000 1100	<b>GB30/GB35</b> 1400/1800 2000/2200 1150/1450	<b>GB40</b> 2000 2400 1750
<b>DB9T</b> 350 700 230	<b>DB12T</b> 500 800 330	<b>DB13T</b> 600 900 500	<b>DB14T</b> 650 950 520	<b>DB15T</b> 700 1000 540	<b>DB17T</b> 850 1000 600	<b>DB20T</b> 1050 1050 980	<b>DB25T</b> 1250 1250 1080	<b>DB30T</b> 1550 1300 1190	<b>DB30T</b> 1550 1300 1240	–
<b>DB9</b> 350 700 210	<b>DB12</b> 500 800 290	<b>DB13</b> 600 900 450	<b>DB14</b> 650 950 470	<b>DB15</b> 700 1000 490	<b>DB17</b> 850 1000 540	–	–	–	–	–
<b>CB9</b> 200 400 140/150	<b>CB12</b> 250 400 210	<b>CB15/CB15C</b> 330/250 500/300 320/360	<b>CB15/CB15C</b> 330/250 500/300 320/360	<b>CB15/CB15C</b> 330/250 500/300 320/360	<b>CB17</b> 360 550 330	<b>CB20</b> 400 590 390	<b>CB25</b> 550 650 490	<b>CB30</b> 700 800 510	<b>CB30</b> 700 800 560	–
–	–	<b>UB15</b> 500 700 420	<b>UB15</b> 500 700 420	<b>UB15</b> 500 700 420	<b>UB17</b> 600 800 500	<b>UB20</b> 700 900 550	<b>UB25</b> 900 900 660	<b>UB30</b> 1000 1000 760	–	–
<b>VB8</b> 400 1700/300 290	<b>VB8</b> 400 1700/300 290	<b>VB15</b> 500 1750/300 390	<b>VB15</b> 500 1750/300 390	<b>VB15</b> 500 1750/300 390	<b>VB15</b> 500 1750/300 390	<b>VB20</b> 600 2000/350 570	<b>VB20</b> 600 2000/350 570	<b>VB20</b> 600 2000/350 570	–	–
<b>SOB8</b> 370 1300 290	<b>SOB8</b> 370 1300 290	<b>SOB14</b> 650 1600 440	<b>SOB15</b> 750 1600 630	<b>SOB15</b> 750 1600 630	<b>SOB17</b> 900 1700 700	<b>SOB20</b> 1100 1700 920	<b>SOB25</b> 1400 2000 1050	<b>SOB25</b> 1400 2000 1050	–	–
<b>SKB8</b> 370 1000 300	<b>SKB8</b> 370 1000 300	<b>SKB14</b> 620 1300 530	–	–	–	–	–	–	–	–
<b>AC10</b> 470 10 142	<b>AC10</b> 470 10 142	<b>AC15</b> 470 10 150	<b>AC15</b> 470 10 150	<b>AC15</b> 470 10 150	<b>AC15</b> 470 10 150	<b>AC20</b> 470 10 170	<b>AC20</b> 470 10 170	<b>AC20</b> 470 10 170	–	–
<b>PF2500</b> 2,5 ton 1200 205	<b>PF2500</b> 2,5 ton 1200 205	<b>PF5000</b> 5 ton 1200 330	<b>PF5000</b> 5 ton 1200 330	<b>PF5000</b> 5 ton 1200 330	<b>PF5000</b> 5 ton 1200 330	<b>PF5000</b> 5 ton 1200 400	<b>PF5000</b> 5 ton 1200 400	<b>PF5000</b> 5 ton 1200 400	–	–
<b>RP45</b> <b>RP50</b> 860 190	<b>RP45</b> <b>RP50</b> 860 190	<b>RP60</b> 1050 340	<b>RP60</b> 1050 340	<b>RP60</b> 1050 340	<b>RP60</b> 1050 340	<b>RP70</b> 1275 640	<b>RP70</b> 1275 640	<b>RP70</b> 1275 640	–	–
S45, S50, HS08	S45, S50, HS08	S60, HS10	S60, HS10	S60, HS10	S60, HS10	S70, HS21	S70, HS21	S70, HS21	S80	S80

Not all products are available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.

# OPEN | S

**Open-S** - the open industry standard for fully automatic quick couplers for excavators. The purpose of Open-S is to provide global interchangeability between quick couplers, tiltrotators and work tools from different manufacturers.

Read more at [www.opens.org](http://www.opens.org)

## **Steelwrist UK Ltd**

Unit 1f Vantage Business Park, Bloxham Road, Banbury, OX16 9UX, UK

Switchboard +44 1608 66 25 34 | Sales +44 1608 66 25 34

Service +44 1608 66 25 34 | Spareparts +44 1608 66 25 34

[www.steelwrist.com](http://www.steelwrist.com)